Let's catch the charm so



RANDOM DESIGN

WALL TILES FLOOR TILES


The success commercial stone industry solely depends upon defects in Rock/stone. Natural defects in ornaments / commercial rock deposits adversely







Denver Cotto

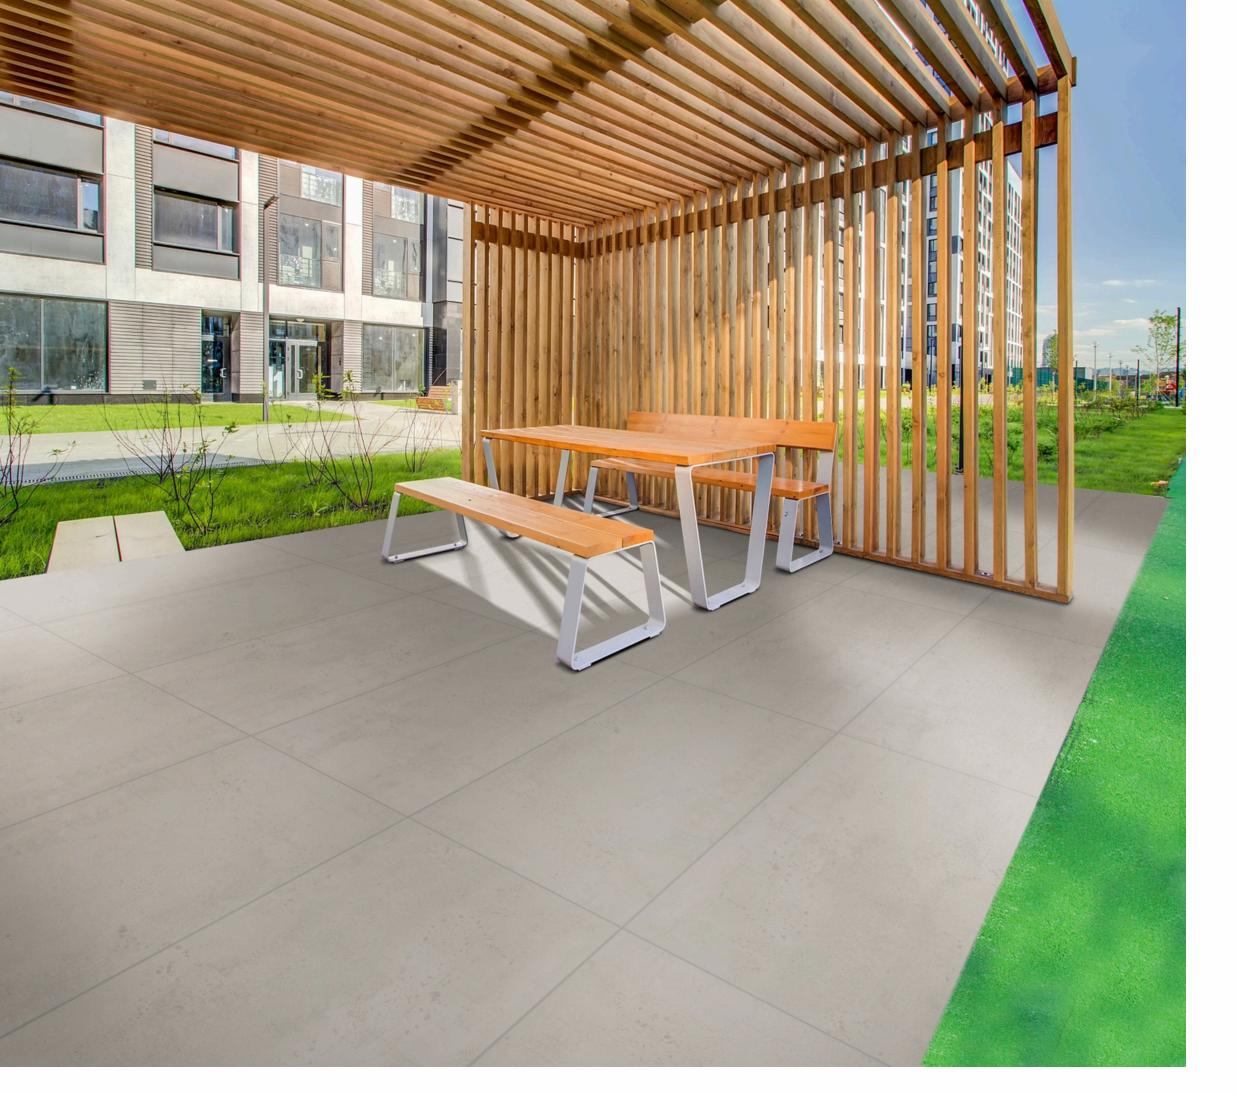





Denver Ash








Denver Cemento





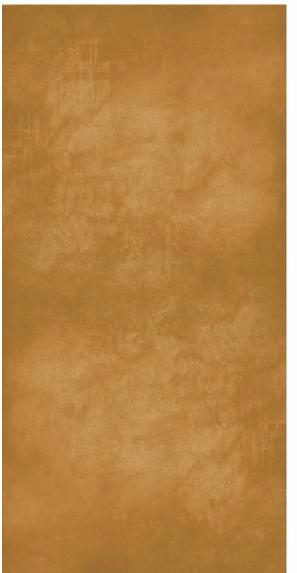

Cyprus Cotto







Cyprus Crema







Cyprus Gris







Cyprus Dark Grey








Cyprus Taupe






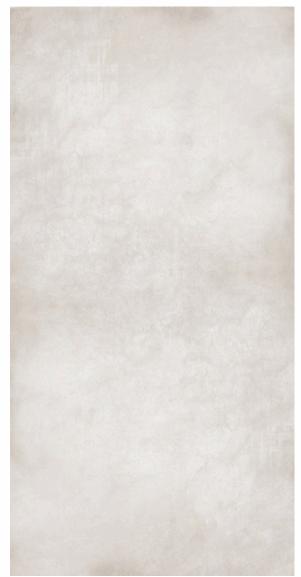

Cyprus Bianco






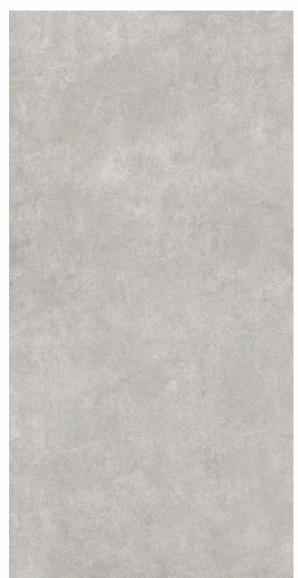

Attic Gris





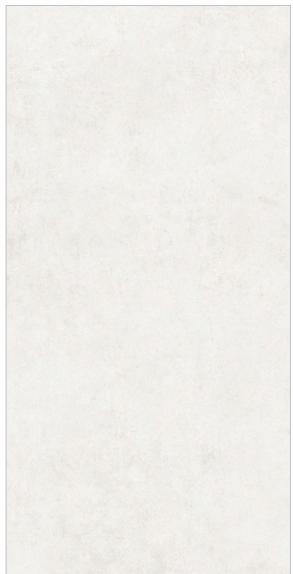

Attic Bianco







Serenity Crema







Serenity Brown







Metal Beige







Metal Wenge







Craft Crema







Craft Bruno








Craft Grey





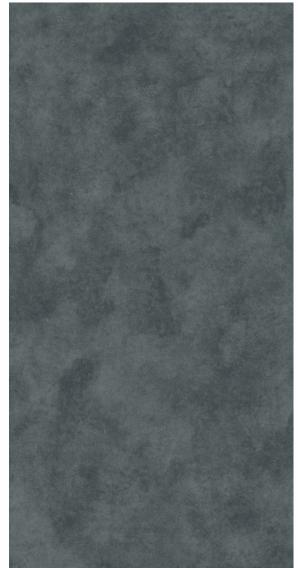

Craft Nero

TECHNICAL SPECIFICATION

Sr. No	Characteristics	Method of Testing	Vitrified Tiles ISO 13006 / EN 176 Group Bla	Values
Α	Dimension & Surface Quality			
1	Deviation in Length & Width	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
2	Deviation in Thickness	ISO 10545-2	+ / - 5.0%	+ / -2.0%
3	Straightness of Sides	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
4	Rectangularity	ISO 10545-2	+ / - 0.5 %	+ / - 0.1%
5	Surface Flatness	ISO 10545-2	+ / - 0.5%	+ / - 0.2%
6	Color Differences	ISO 10545-16	Unaltered	No Change
7	Surface Coating	Nano Machine	As Per Manfacturer Norms	Nano Polished
В	Physical Properties			
1	Water Absorption	ISO 10545-3	< 0.5%	0.08%
2	Flexural Strength (MOR)	ISO 10545-4	> 27 N / mm2	> 30 N / mm2
3	Mohs Hardness	EN 101	Min 6	6 Mohs
4	Flexural Breaking Strength	ISO 10545-4	> 1113 N	2350 N
5	Bulk Density (Gm / cc)	DIN 51082	>2 gm/cc	2.35 gm/cc
6	Glossiness	Glossometer	As Per Manfacturer Norms	Min 85 % reflection
7	Slip Resistance Coefficient of Friction	ISO 10545-17	> 0.4	> 0.6
8	Crazing Resistance	ISO 10545-11	Min 4 Cycle @ 7.5 Bar	Passes 4 Cycle
9	Resistance Of Surface Abrasion	ISO 10545-6	As Per Manfacturer Norms	> PEI I V
С	Chemical Properties			
1	Staining Resistance	ISO 10545-14	Resistant	Resistant
2	Household Chemicals	ISO 10545-13	No Damage	No Damage
D	Thermal Properties			
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage
2	Thermal Expansion	ISO 10545-10	9 x 10 - 6 max	6 x 10 -6
3	Moisture Expansion	ISO 10545 - 10	Nil	Nil

PACKING DETAILS

PRODUCT	SIZE	PCS/BOX	COVERAGE AREA	
GLAZED VITRIFIED TILES	600x1200mm	2	1.44 SQ. MTR.	15.50 SQ. FT.

Note: Color shown are as accurate as the limitation of the printing process will allow. Prospective customers are advice to inspect a sample of the tile before ordering. Every efforts has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

APPLICATION



AIRPORT TERMINAL



DISCO THEQUE



INDUSTRIES



RELIGIOUS PLACES



GYMNASIUNS



HOTEL



CORRIDOR HALLS



SCHOOLS



DOMESTIC



OFFICES



SUPER MARKET



SHOPPING MALLS